

Configviz – examples


Standard configuration

This example shows the generated jpg for a configuration using the default format.

The XML:

```
<?xml version="1.0" ?>
<properties extends="base">
  <include properties="base.properties"/>
  <variables>
    <variable name="my.path" value="/usr/development/mystuff/etc"/>
    <variable name="app.name" value="MyStuff"/>
  </variables>
  <category name="general">
    <property name="servlet_context" value="/MyStuff"/>
    <property name="image_path" value="/MyStuff/img"/>
    <property name="upload_dir" value="/tmp/upload"/>
    <property name="debug_file" value="/tmp/mystuff.log"/>
    <property name="array" value="is, there, anybody, out, there"/>
    <property name="mydate" value="2004-29-09"/>
  </category>
  <category name="MyApp">
    <property name="user" value="/home/${user.name}/${app.name}"/>
    <property name="application" value="${app.name}"/>
    <property name="path" value="${my.path}/test.file"/>
    <property name="complexArray" value="hello, ${app.name}"/>
    <property name="getme" value="hello\nworld"/>
  </category>
  <category name="simpleTypes">
    <property name="charValue" value="C"/>
    <property name="doubleValue" value="12.3"/>
    <property name="intValue" value="1"/>
    <property name="longValue" value="326781"/>
  </category>
  <category name="JDBC">
    <property name="URL" value="jdbc:mysql://localhost/iportal"/>
    <property name="DRIVER" value="org.gjt.mm.mysql.Driver"/>
    <property name="PWD" value="dice"/>
    <property name="USER" value="dice"/>
  </category>
  <category name="includeTest">
    <property name="varprop1" value="${var1}"/>
  </category>
</properties>
```

The image

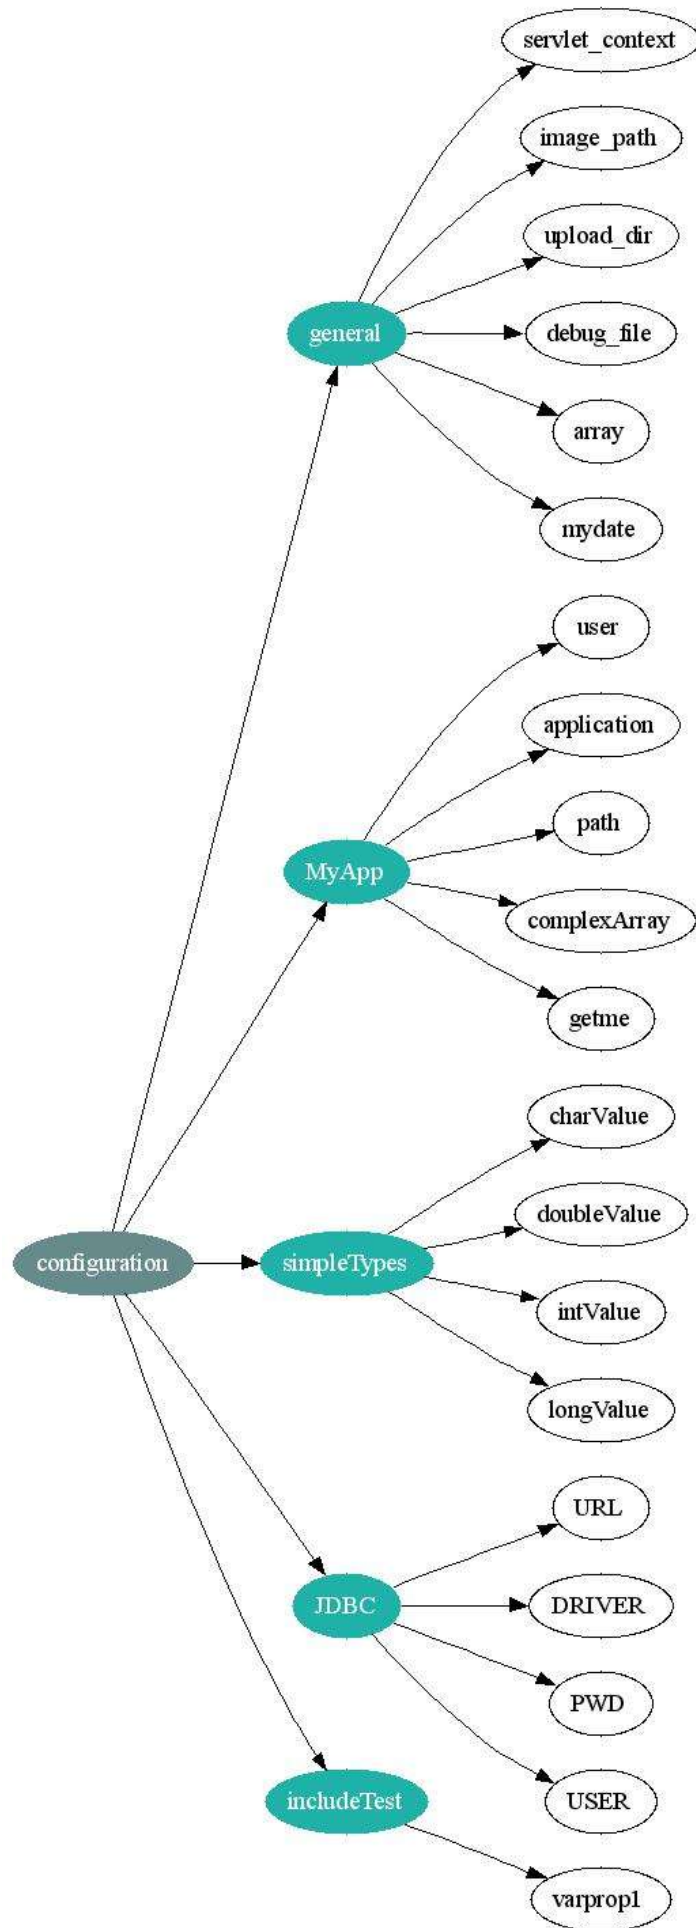

Advanced configuration

This example covers the advanced or extensible configuration format. If a category extends another one then a red arrow is drawn to mark this.


The XML

```
<?xml version="1.0" ?>
<properties>

  <category name="general">
    <special>one</special>
    <hello>world</hello>
    <escapetest>this is me</escapetest>
  </category>
  <category name="inner" extends="general">
    <number>one</number>
    <text>hello woldr</text>
  </category>

</properties>
```

The image

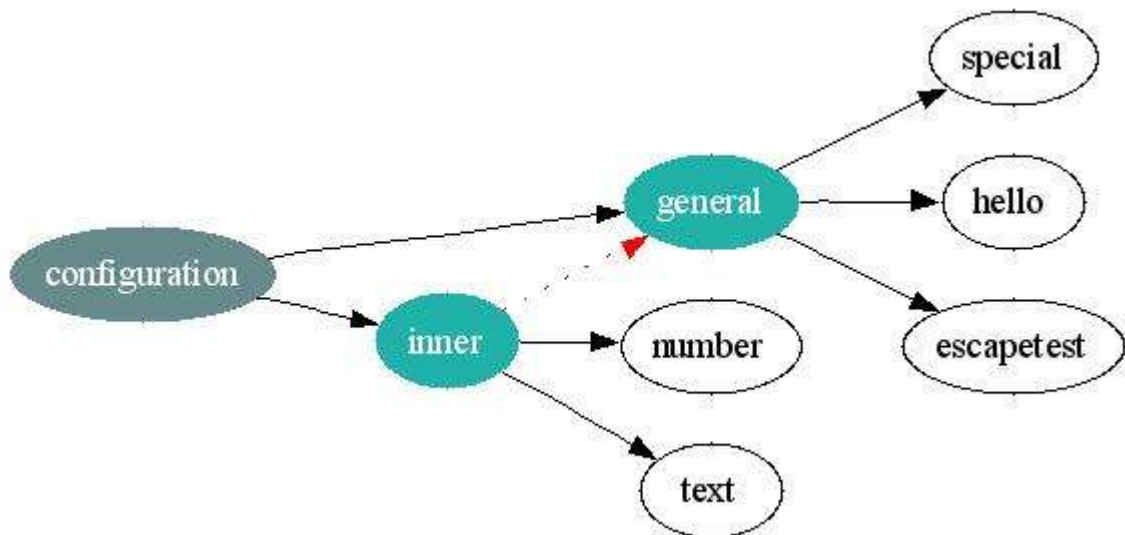

Nested configuration

This example shows an image for a nested configuration.

The XML

```
<?xml version="1.0" ?>
<properties extends="base">
  <include properties="inheritance.properties"/>
  <category name="general">
    <special>two</special>
    <port>8080</port>
  </category>
  <category name="MyApp">
    <getme>1,2,3,4,5,6,7,8,9,10</getme>
  </category>
  <category name="includeTest">
    <varprop1>${var1}</varprop1>
  </category>
  <category name="addon">
    <path1>/tmp/path1</path1>
    <path2>/tmp/path2</path2>
    <category name="inneraddon">
      <setpath>>true</setpath>
    </category>
  </category>
</properties>
```

The image

